

The Complexity of (List) Edge-Coloring Reconfiguration Problem^{*}

Hiroki Osawa¹, Akira Suzuki^{1,2}, Takehiro Ito^{1,2}, and Xiao Zhou¹

¹ Graduate School of Information Sciences, Tohoku University,
Aoba-yama 6-6-05, Aoba-ku, Sendai, 980-8579, Japan.

² CREST, JST, 4-1-8 Honcho, Kawaguchi, Saitama, 332-0012, Japan.
hiroki.osawa.r3@dc.tohoku.ac.jp
{a.suzuki, takehiro, zhou}@ecei.tohoku.ac.jp

Abstract. Let G be a graph such that each edge has its list of available colors, and assume that each list is a subset of the common set consisting of k colors. Suppose that we are given two list edge-colorings f_0 and f_r of G , and asked whether there exists a sequence of list edge-colorings of G between f_0 and f_r such that each list edge-coloring can be obtained from the previous one by changing a color assignment of exactly one edge. This problem is known to be PSPACE-complete for every integer $k \geq 6$ and planar graphs of maximum degree three, but any complexity hardness was unknown for the non-list variant. In this paper, we first improve the known result by proving that, for every integer $k \geq 4$, the problem remains PSPACE-complete even if an input graph is planar, bounded bandwidth, and of maximum degree three. We then give the first complexity hardness result for the non-list variant: for every integer $k \geq 5$, we prove that the non-list variant is PSPACE-complete even if an input graph is planar, of bandwidth linear in k , and of maximum degree k .

1 Introduction

Recently, reconfiguration problems [10] have been intensively studied in the field of theoretical computer science. The problem arises when we wish to find a step-by-step transformation between two feasible solutions of a combinatorial (search) problem such that all intermediate results are also feasible and each step conforms to a fixed reconfiguration rule, that is, an adjacency relation defined on feasible solutions of the original search problem. (See, e.g., the survey [9] and references in [6,13].)

^{*} This work is partially supported by JSPS KAKENHI Grant Numbers JP26730001 (A. Suzuki), JP15H00849 and JP16K00004 (T. Ito), and JP16K00003 (X. Zhou).

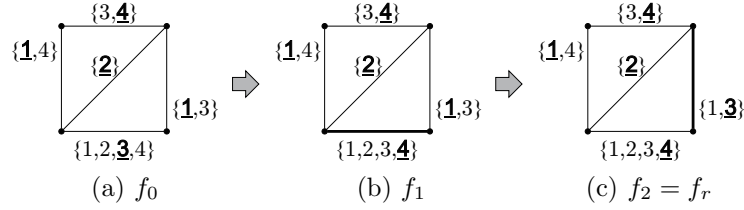


Fig. 1. A sequence of list edge-colorings of the same graph with the same list.

1.1 Our problem

In this paper, we study the reconfiguration problem for (list) edge-colorings of a graph [11,12]. Let $C = \{1, 2, \dots, k\}$ be the set of k colors. A (proper) *edge-coloring* of a graph $G = (V, E)$ is a mapping $f : E \rightarrow C$ such that $f(e) \neq f(e')$ holds for every two adjacent edges $e, e' \in E$. In *list edge-coloring*, each edge $e \in E$ has a set $L(e) \subseteq C$ of colors, called the *list* of e . Then, an edge-coloring f of G is called a *list edge-coloring* of G if $f(e) \in L(e)$ holds for every edge $e \in E$. Figure 1 illustrates three list edge-colorings of the same graph G with the same list L ; the list of each edge is attached to the edge, and the color assigned to each edge is written in bold with an underline. Clearly, an (ordinary) edge-coloring of G is a list edge-coloring of G for which $L(e) = C$ holds for every edge e of G , and hence list edge-coloring is a generalization of edge-coloring.

Ito et al. [12] introduced an adjacency relation defined on list edge-colorings of a graph, and define the LIST EDGE-COLORING RECONFIGURATION problem, as follows: Suppose that we are given two list edge-colorings of a graph G (e.g., the leftmost and rightmost ones in Fig. 1), and we are asked whether we can transform one into the other via list edge-colorings of G such that each differs from the previous one in only one edge color assignment; such a sequence of list edge-colorings is called a *reconfiguration sequence*. We call this problem the LIST EDGE-COLORING RECONFIGURATION problem. For the particular instance of Fig. 1, the answer is “yes” as illustrated in the figure, where the edge whose color assignment was changed from the previous one is depicted by a thick line.

For convenience, we call the problem simply the *non-list variant* (formally, EDGE-COLORING RECONFIGURATION) if $L(e) = C$ holds for every edge e of a given graph.

1.2 Known and related results

Despite recent intensive studies on reconfiguration problems (in particular, for graph colorings [1,2,3,4,5,7,11,12,14,16]), as far as we know, only one complexity result is known for LIST EDGE-COLORING RECONFIGURATION. Ito et al. [11] proved that LIST EDGE-COLORING RECONFIGURATION is PSPACE-complete even when restricted to $k = 6$ and planar graphs of maximum degree three. (Since the list of each edge is given as an input, this result implies that the problem is

PSPACE-complete for every integer $k \geq 6$.) They also gave a sufficient condition for which any two list edge-colorings of a tree can be transformed into each other, which was improved by [12]; but these sufficient conditions do not clarify the complexity status for trees, and indeed it remains open.

As a related problem, the (LIST) VERTEX-COLORING RECONFIGURATION problem has been studied intensively. (LIST VERTEX-COLORING RECONFIGURATION and its non-list variant are defined analogously.) Bonsma and Cereceda [3] proved that VERTEX-COLORING RECONFIGURATION is PSPACE-complete for every integer $k \geq 4$. On the other hand, Cereceda et al. [5] proved that both LIST VERTEX-COLORING RECONFIGURATION and its non-list variant are solvable in polynomial time for any graph if $k \leq 3$. Thus, the complexity status of VERTEX-COLORING RECONFIGURATION is analyzed sharply with respect to the number k of colors.

Edge-coloring in a graph G can be reduced to vertex-coloring in the line graph of G . By this reduction, we can solve LIST EDGE-COLORING RECONFIGURATION for any graph if $k \leq 3$. However, the reduction does not work the other way, and hence this reduction does not yield any computational hardness result. Indeed, the complexity of EDGE-COLORING RECONFIGURATION was an open question proposed by [11].

1.3 Our contribution

In this paper, we precisely analyze the complexity of (LIST) EDGE-COLORING RECONFIGURATION; in particular, we give the first complexity result for the non-list variant.

We first improve the known result for LIST EDGE-COLORING RECONFIGURATION by proving that, for every integer $k \geq 4$, the problem remains PSPACE-complete even if an input graph is planar, bounded bandwidth, and of maximum degree three. Recall that the problem is solvable in polynomial time if $k \leq 3$, and hence our result gives a sharp analysis of the complexity status with respect to the number k of colors. We then give the first complexity result for the non-list variant: EDGE-COLORING RECONFIGURATION is PSPACE-complete for every integer $k \geq 5$ and planar graphs whose maximum degrees are k and bandwidths are linear in k .

We here explain our main technical contribution roughly. (All the details will be given later.) Both our results can be obtained by constructing polynomial-time reductions from NONDETERMINISTIC CONSTRAINT LOGIC (NCL, for short), introduced by Hearn and Demaine [8]. This problem is often used to prove the computational hardness of puzzles and games, because a reduction from this problem requires to construct only two types of gadgets, called AND and OR gadgets. However, there is another difficulty for our problems, that is, how the gadgets communicate with each other. We handle this difficulty by introducing the “neutral orientation” to NCL. In addition, our AND/OR gadgets are very complicated, and hence for showing the correctness of our reductions, we clarify the sufficient conditions (which we call “internally connected” and “external ad-

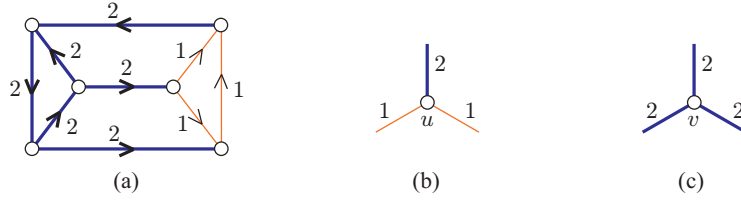


Fig. 2. (a) A configuration of an NCL machine, (b) NCL AND vertex u , and (c) NCL OR vertex v .

jacency”) so that the gadgets correctly work. We show that our gadgets indeed satisfy these conditions by a computer search.

2 Nondeterministic Constraint Logic

In this section, we define the NONDETERMINISTIC CONSTRAINT LOGIC problem [8].

An NCL “machine” is an undirected graph together with an assignment of weights from $\{1, 2\}$ to each edge of the graph. An (*NCL*) *configuration* of this machine is an orientation (direction) of the edges such that the sum of weights of in-coming arcs at each vertex is at least two. Figure 2(a) illustrates a configuration of an NCL machine, where each weight-2 edge is depicted by a thick (blue) line and each weight-1 edge by a thin (orange) line. Then, two NCL configurations are *adjacent* if they differ in a single edge direction. Given an NCL machine and its two configurations, it is known to be PSPACE-complete to determine whether there exists a sequence of adjacent NCL configurations which transforms one into the other [8].

An NCL machine is called an AND/OR *constraint graph* if it consists only of two types of vertices, called “NCL AND vertices” and “NCL OR vertices” defined as follows:

1. A vertex of degree three is called an *NCL AND vertex* if its three incident edges have weights 1, 1 and 2. (See Fig. 2(b).) An NCL AND vertex u behaves as a logical AND, in the following sense: the weight-2 edge can be directed outward for u if and only if both two weight-1 edges are directed inward for u . Note that, however, the weight-2 edge is not necessarily directed outward even when both weight-1 edges are directed inward.
2. A vertex of degree three is called an *NCL OR vertex* if its three incident edges have weights 2, 2 and 2. (See Fig. 2(c).) An NCL OR vertex v behaves as a logical OR: one of the three edges can be directed outward for v if and only if at least one of the other two edges is directed inward for v .

It should be noted that, although it is natural to think of NCL AND/OR vertices as having inputs and outputs, there is nothing enforcing this interpretation; especially for NCL OR vertices, the choice of input and output is entirely arbitrary because an NCL OR vertex is symmetric.

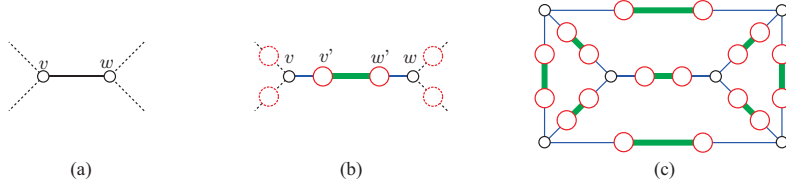


Fig. 3. (a) An NCL edge vw , (b) its subdivision into a path $vv'w'w$, and (c) the resulting graph which corresponds to the NCL machine in Fig. 2(a), where newly added vertices are depicted by (red) large circles, link edges by (green) thick lines and connector edges by (blue) thin lines.

For example, the NCL machine in Fig. 2(a) is an AND/OR constraint graph. From now on, we call an AND/OR constraint graph simply an *NCL machine*, and call an edge in an NCL machine an *NCL edge*. NCL remains PSPACE-complete even if an input NCL machine is planar and bounded bandwidth [17].

3 Our Results

In this section, we give our results. Observe that LIST EDGE-COLORING RECONFIGURATION can be solved in (most conveniently, nondeterministic [15]) polynomial space, and hence it is in PSPACE. Therefore, we show the PSPACE-hardness. Our reductions from NCL take the same strategy, and hence we first give the common preparation in Section 3.1. Then, we prove the PSPACE-hardness of LIST EDGE-COLORING RECONFIGURATION in Section 3.2 and the non-list variant in Section 3.3.

3.1 Preparation for reductions

Suppose that we are given an instance of NCL, that is, an NCL machine and two orientations of the machine.

We first subdivide every NCL edge vw into a path $vv'w'w$ of length three by adding two new vertices v' and w' . (See Fig. 3(a) and (b).) We call the edge $v'w'$ a *link edge* between two NCL vertices v and w , and call the edges vv' and $w'w$ *connector edges* for v and w , respectively. Notice that every vertex in the resulting graph belongs to exactly one of stars $K_{1,3}$ such that the center of each $K_{1,3}$ corresponds to an NCL AND/OR vertex. Furthermore, these stars are all mutually disjoint, and joined together by link edges. (See Fig. 3(c) as an example.)

Our reduction thus involves constructing three types of gadgets which correspond to link edges and stars of NCL AND/OR vertices; we will replace each of link edges and stars of NCL AND/OR vertices with its corresponding gadget. In our reduction, assigning the color 1 to the connector edge vv' always corresponds to directing the connector edge vv' from v' to v (i.e., the inward direction for

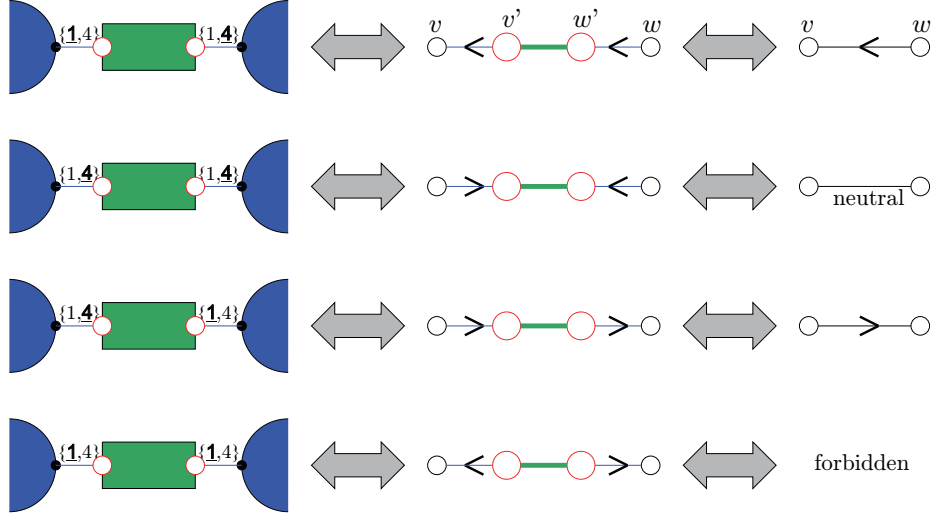


Fig. 4. (a) Color assignments to connector edges, (b) their corresponding orientations of the edges vv' and $w'w$, and (c) the corresponding orientations of an NCL edge vw .

v), while assigning the color 4 to vv' always corresponds to directing vv' from v to v' (i.e., the outward direction for v).

3.2 List edge-coloring reconfiguration

In this subsection, we prove the following theorem.

Theorem 1. *For every integer $k \geq 4$, the LIST EDGE-COLORING RECONFIGURATION problem is PSPACE-complete even if an input graph is planar, of maximum degree three, and has bounded bandwidth.*

We prove the theorem in the remainder of this subsection. As we have mentioned in Section 3.1, it suffices to construct three types of gadgets which correspond to link edges and stars of NCL AND/OR vertices.

• Link edge gadget.

Recall that, in a given NCL machine, two NCL vertices v and w are joined by a single NCL edge vw . Therefore, the link edge gadget between v and w should be consistent with the orientations of the NCL edge vw , as follows (see also Fig. 4): If we assign the color 1 to the connector edge vv' (i.e., the inward direction for v), then $w'w$ must be colored with 4 (i.e., the outward direction for w); conversely, vv' must be colored with 4 if we assign 1 to $w'w$. In particular, the gadget must forbid a list edge-coloring which assigns 1 to both vv' and $w'w$ (i.e., the inward directions for both v and w), because such a coloring corresponds to the direction which illegally contributes to both v and w at the same time. On




Fig. 5. The link edge gadget for LIST EDGE-COLORING RECONFIGURATION.

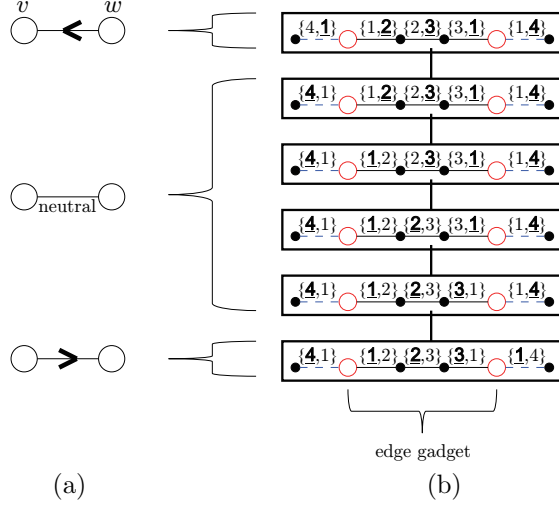


Fig. 6. (a) Three orientations of an NCL edge vw , and (b) all list edge-colorings of the link edge gadget with two connector edges.

the other hand, assigning 4 to both vv' and ww' (i.e., the outward directions for both v and w) corresponds to the *neutral* orientation of the NCL edge vw which contributes to neither v nor w , and hence we simply do not care such an orientation.

Figure 5 illustrates our link edge gadget between two NCL vertices v and w . Figure 6(b) illustrates the “reconfiguration graph” of this link edge gadget together with two connector edges vv' and ww' : each rectangle represents a node of the reconfiguration graph, that is, a list edge-coloring of the gadget, where the underlined bold number represents the color assigned to the edge, and two rectangles are joined by an edge in the reconfiguration graph if their corresponding list edge-colorings are adjacent. Then, the reconfiguration graph is connected as illustrated in Fig. 6(b), and the link edge gadget has no list edge-coloring which assigns 4 to the two connector edges vv' and ww' at the same time, as required. Furthermore, the reversal of the NCL edge vw can be simulated by the path via the neutral orientation of vw , as illustrated in Fig. 6(a). Thus, this link edge gadget works correctly.

- **AND gadget.**

Consider an NCL AND vertex v . Figure 7(a) illustrates all valid orientations of the three connector edges for v ; each box represents a valid orientation of

the three connector edges for v , and two boxes are joined by an edge if their orientations are adjacent. We construct our AND gadget so that it correctly simulates this reconfiguration graph in Fig. 7(a).

Figure 8 illustrates our AND gadget for each NCL AND vertex v , where e_1 , e_2 and e_a correspond to the three connector edges for v such that e_1 and e_2 come from the two weight-1 NCL edges and e_a comes from the weight-2 NCL edge. Figure 7(b) illustrates the reconfiguration graph for all list edge-colorings of the AND gadget, where each large box surrounds all colorings having the same color assignments to the three connector edges for v . Then, we can see that these list edge-colorings are “internally connected,” that is, any two list edge-colorings in the same box are reconfigurable with each other without recoloring any connector edge. Furthermore, this gadget preserves the “external adjacency” in the following sense: if we contract the list edge-colorings in the same box in Fig. 7(b) into a single vertex, then the resulting graph is exactly the graph depicted in Fig. 7(a). Therefore, we can conclude that our AND gadget correctly works as an NCL AND vertex.

- **OR gadget.**

Figure 9 illustrates our OR gadget for each NCL OR vertex v , where e_1 , e_2 and e_3 correspond to the three connector edges for v . To verify that this OR gadget correctly simulates an NCL OR vertex, it suffices to show that this gadget satisfies both the internal connectedness and the external adjacency. However, since this gadget has 1575 list edge-colorings, we have checked that our OR gadget satisfies these sufficient conditions by a computer search of all list edge-colorings of the gadget.

Reduction.

As we have explained before, we replace each of link edges and stars of NCL AND/OR vertices with its corresponding gadget; let G be the resulting graph. Since NCL remains PSPACE-complete even if an input NCL machine is planar, bounded bandwidth and of maximum degree three, the resulting graph G is also planar, bounded bandwidth and of maximum degree three; notice that, since each gadget consists of only a constant number of edges, the bandwidth of G is also bounded.

In addition, we construct two list edge-colorings of G which correspond to two given NCL configurations C_0 and C_r of the NCL machine. Note that there are (in general, exponentially) many list edge-colorings which correspond to the same NCL configuration. However, by the construction of the three gadgets, no two distinct NCL configurations correspond to the same list edge-coloring of G . We thus arbitrarily choose two list edge-colorings f_0 and f_r of G which correspond to C_0 and C_r , respectively.

Clearly, the construction can be done in polynomial time.

Correctness.

We now prove that there exists a desired sequence of NCL configurations between C_0 and C_r if and only if there exists a reconfiguration sequence between f_0 and f_r .

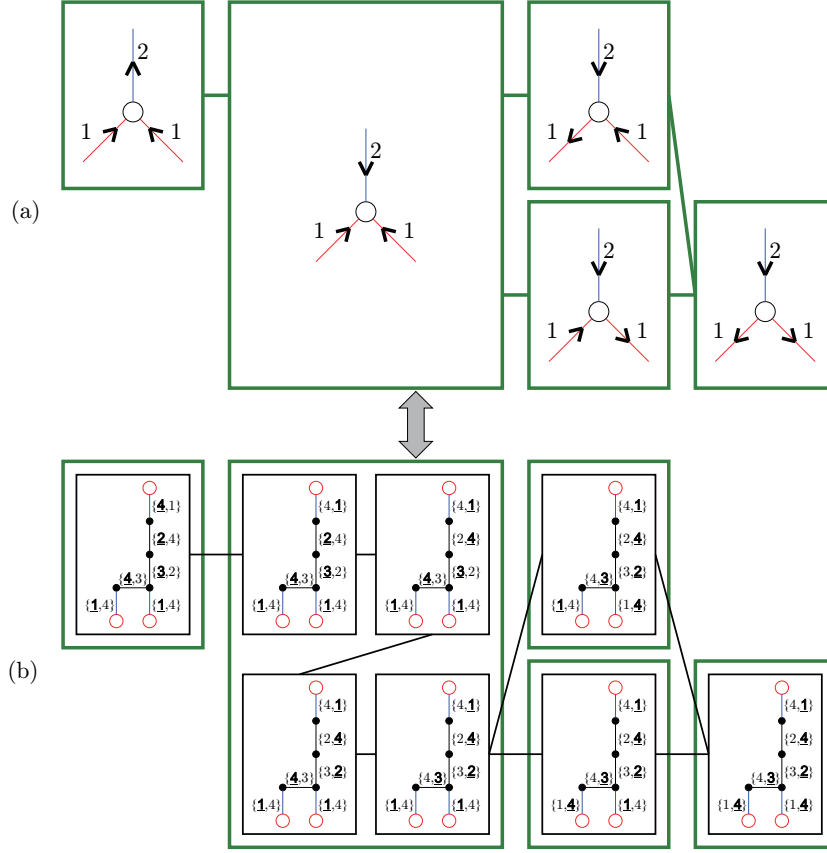


Fig. 7. (a) All valid orientations of the three connector edges for an NCL AND vertex v , and (b) all list edge-colorings of the AND gadget in Fig. 8.

We first prove the only-if direction. Suppose that there exists a desired sequence of NCL configurations between C_0 and C_r , and consider any two adjacent NCL configurations C_{i-1} and C_i in the sequence. Then, only one NCL edge vw changes its orientation between C_{i-1} and C_i . Notice that, since both C_{i-1} and C_i are valid NCL configurations, the NCL AND/OR vertices v and w have enough in-coming arcs even without vw . Therefore, we can simulate this reversal by the reconfiguration sequence of list edge-colorings in Fig. 6(b) which passes through the neutral orientation of vw as illustrated in Fig. 6(a). Recall that both AND and OR gadgets are internally connected, and preserve the external adjacency. Therefore, any reversal of an NCL edge can be simulated by a reconfiguration sequence of list edge-colorings of G , and hence there exists a reconfiguration sequence between f_0 and f_r .

We now prove the if direction. Suppose that there exists a reconfiguration sequence $\langle f_0, f_1, \dots, f_\ell \rangle$ from f_0 to $f_\ell = f_r$. Notice that, by the construction of




Fig. 8. The AND gadget for LIST EDGE-COLORING RECONFIGURATION.

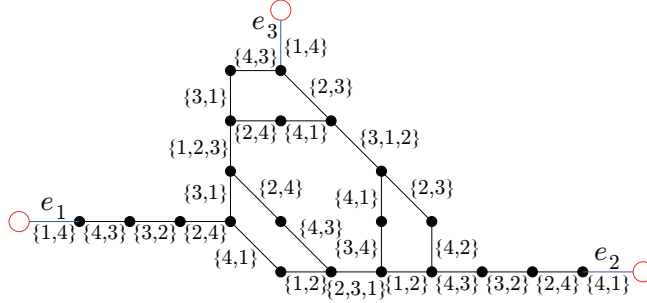


Fig. 9. The OR gadget for LIST EDGE-COLORING RECONFIGURATION.

gadgets, any list edge-coloring of G corresponds to a valid NCL configuration such that some NCL edges may take the neutral orientation. In addition, f_0 and f_r correspond to valid NCL configurations without any neutral orientation. Pick the first index i in the reconfiguration sequence $\langle f_0, f_1, \dots, f_\ell \rangle$ which corresponds to changing the direction of an NCL edge vw to the neutral orientation. Then, since the neutral orientation contributes to neither v nor w , we can simply ignore the change of the NCL edge vw and keep the direction of vw as the same as the previous direction. By repeating this process and deleting redundant orientations if needed, we can obtain a sequence of valid adjacent orientations between C_0 and C_r such that no NCL edge takes the neutral orientation.

This completes the proof of Theorem 1.

3.3 Edge-coloring reconfiguration

In this subsection, we prove the following theorem for the non-list variant.

Theorem 2. *For every integer $k \geq 5$, the EDGE-COLORING RECONFIGURATION problem is PSPACE-complete even if an input graph is planar whose maximum degree is k and bandwidth is linear in k .*

To prove the theorem, similarly as in the previous subsection, it suffices to construct three types of gadgets corresponding to a link edge and stars of NCL AND/OR vertices. However, since we deal with the non-list variant, every edge



(b)



Fig. 11. Explanatory note for the gadgets in Fig. 12.

 $\mathcal{V}$.

RECONFIGURATION is a yes-instance.



This completes the proof of Theorem 2. $\square$

In this paper, we have shown the PSPACE-completeness of LIST EDGE-COLORING RECONFIGURATION and its non-list variant. We emphasize again that our result for LIST EDGE-COLORING RECONFIGURATION gives a sharp analysis of the complexity status with respect to the number k of colors. In addition, our result is the first complexity hardness result for the non-list variant.

1. Bonamy, M., Bousquet, N.: Recoloring bounded treewidth graphs. *Electronic Notes in Discrete Mathematics* 44, pp. 257–262 (2013)
2. Bonamy, M., Johnson, M., Lignos, I., Patel, V., Paulusma, D.: Reconfiguration graphs for vertex colourings of chordal and chordal bipartite graphs. *J. Combinatorial Optimization* 27, pp. 132–143 (2014)

3. Bonsma, P., Cereceda, L.: Finding paths between graph colourings: PSPACE-completeness and superpolynomial distances. *Theoretical Computer Science* 410, pp. 5215–5226 (2009)
4. Bonsma, P., Mouawad, A.E., Nishimura, N., Raman, V.: The complexity of bounded length graph recoloring and CSP reconfiguration. *Proc. of IPEC 2014, LNCS* 8894, pp. 110–121 (2014)
5. Cereceda, L., van den Heuvel, J., Johnson, M.: Finding paths between 3-colorings. *J. Graph Theory* 67, pp. 69–82 (2011)
6. Demaine, E.D., Demaine, M.L., Fox-Epstein, E., Hoang, D.A., Ito, T., Ono, H., Otachi, Y., Uehara, R., Yamada, T.: Linear-time algorithm for sliding tokens on trees. *Theoretical Computer Science* 600, 132–142 (2015)
7. Hatanaka, T., Ito, T., Zhou, X.: The list coloring reconfiguration problem for bounded pathwidth graphs. *IEICE Trans. on Fundamentals of Electronics, Communications and Computer Sciences* E98-A, 1168–1178 (2015)
8. Hearn, R.A., Demaine, E.D.: PSPACE-completeness of sliding-block puzzles and other problems through the nondeterministic constraint logic model of computation. *Theoretical Computer Science* 343, pp. 72–96 (2005)
9. van den Heuvel, J.: The complexity of change. *Surveys in Combinatorics 2013*, London Mathematical Society Lecture Notes Series 409 (2013)
10. Ito, T., Demaine, E.D., Harvey, N.J.A., Papadimitriou, C.H., Sideri, M., Uehara, R., Uno, Y.: On the complexity of reconfiguration problems. *Theoretical Computer Science* 412, pp. 1054–1065 (2011)
11. Ito, T., Kamiński, M., Demaine, E.D.: Reconfiguration of list edge-colorings in a graph. *Discrete Applied Mathematics* 160(15), pp. 2199–2207 (2012)
12. Ito, T., Kawamura, K., Zhou, X.: An improved sufficient condition for reconfiguration of list edge-colorings in a tree. *IEICE Trans. on Information and Systems* E95-D(3), pp. 737–745 (2012)
13. Ito, T., Ono, H., Otachi, Y.: Reconfiguration of cliques in a graph. *Proc. of TAMC 2015, LNCS* 9076, pp. 212–223 (2015)
14. Johnson, M., Kratsch, D., Kratsch, S., Patel, V., Paulusma, D.: Finding shortest paths between graph colourings. *To appear in Algorithmica*. DOI: 0.1007/s00453-015-0009-7
15. Savitch, W.J.: Relationships between nondeterministic and deterministic tape complexities. *J. Computer and System Sciences* 4, pp. 177–192 (1970)
16. Wrochna, M.: Reconfiguration in bounded bandwidth and treedepth. [arXiv:1405.0847](https://arxiv.org/abs/1405.0847) (2014)
17. van der Zanden, T.C.: Parameterized complexity of graph constraint logic. *Proc. of IPEC 2015, LIPIcs* 9076, pp. 282–293 (2015)